

PSP - 1/2/3

Power Supply Panel - 1 / 2 / 3



QUICK FACTS

- 230 V AC input
- 24 V AC output
- Miniature Circuit Breaker (MCB) protection
- Multiple power supply output terminals per interface and actuator groups
- LED Power indication for supply and main protected circuits
- Fused terminals
- Key-locked panel door
- Finished in RAL 7035

POWER SUPPLY PANEL (PSP) - 1/2/3

Power Supply Panel provides a dedicated 24 V AC supply to SFDIs or SDIs and the 24 V AC actuator groups they control.

Available in three sizes: PSP-1, PSP-2, and PSP-3.

The quantity of SFDI / SDIs and 24 V actuator groups per panel depends on the actuator load - the total load can not exceed the rated output.

Power supply panels can be mounted locally to the damper control panel, or distributed through the building to minimise cabling.

Installers should be mindful of voltage drop on 24 V cable runs, therefore extensive daisy-chaining of 24 V supplies should be avoided.

	PSP-1	PSP-2	PSP-3
Size - mm (NTS)	400 (W) x 500 (H) x 210 (D)	400 (W) x 500 (H) x 210 (D)	500 (W) x 500 (H) x 210 (D)
Devices	• 1no. 150 VA Transformer • 1no. 2A C-MCB • 1no. 6A C-MCB	• 1no. 300 VA Transformer • 1no. 4A C-MCB • 2no. 6A C-MCB	• 1no. 500 VA Transformer • 4no. 6A C-MCB
Panel Features	• Keylocks on door • Cable numbering • 1no. Power Supply Healthy LED (green) • 1no. 24 V Damper Circuit Power LED (green) • up to 10no. +V&-V 24 V fused output terminals • Maximum output 150 VA	• Keylocks on door • Cable numbering • 1no. Power Supply Healthy LED (green) • 2no. 24 V Damper Circuit Power LEDs (green) • up to 20no. +V&-V 24 V fused output terminals • Maximum output 300 VA	• Keylocks on door • Cable numbering • 1no. Power Supply Healthy LED (green) • 3no. 24 V Damper Circuit Power LEDs (green) • up to 30no. +V&-V 24 V fused output terminals • Maximum output 500 VA
Colour	RAL 7035		
Hinged	Left		
230 V Power Cables	Top entry (RHS)		
24 V Power Cables	Top entry (LHS)		
Notes	Must be kept in a ventilated environment. Code: European Cable Colour L/Brown N/Blue E/Green&Yellow		

Power Supply Panel

To supply up to 10 SFDIs / SDIs and 24 V actuator groups - maximum output 150 VA.

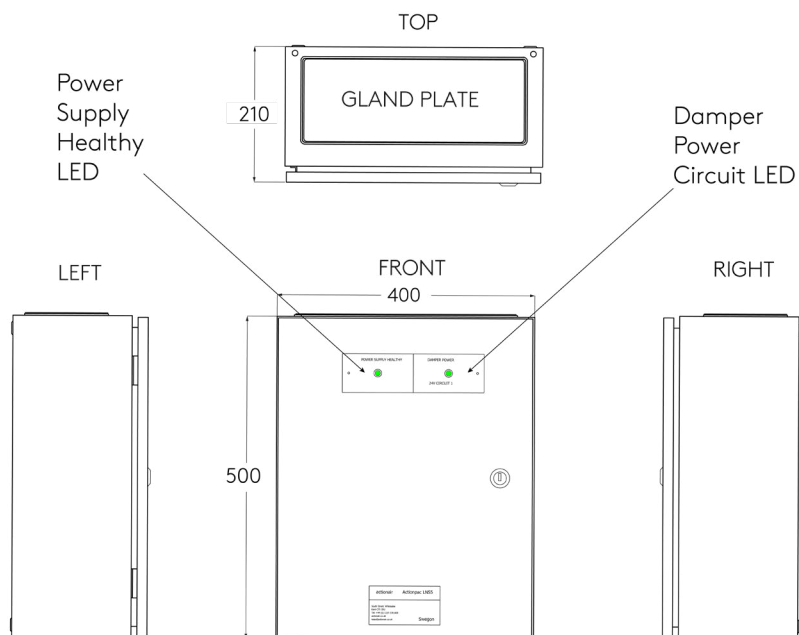


Figure 1. PSP-1 top, front, left, and right views, and LEDs

Power Supply Panel PSP-2

To supply up to 20 SFDIs / SDIs and 24 V actuator groups - maximum output 300 VA.

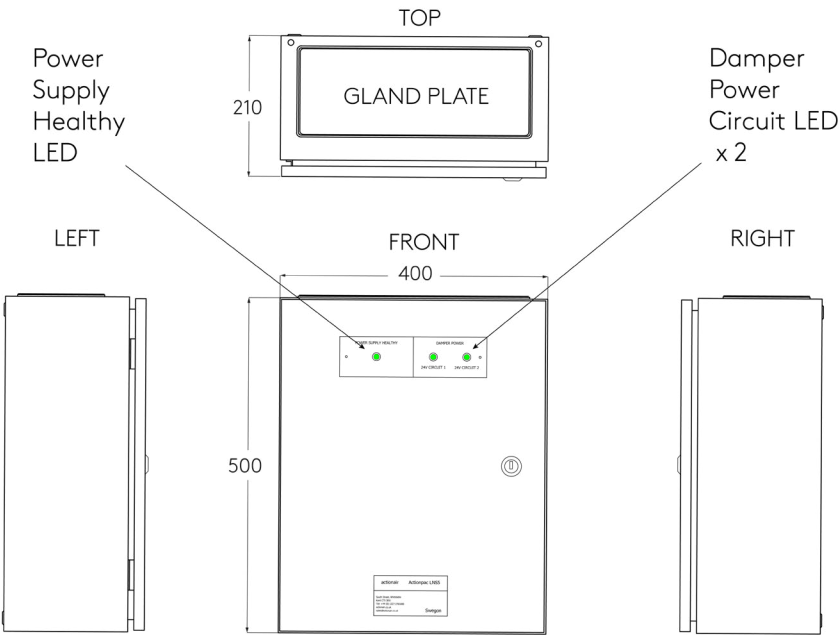


Figure 2. PSP-2 top, front, left, and right views, and LEDs

Power Supply Panel PSP-3

To supply up to 30 SFDIs / SDIs and 24 V actuator groups - maximum output 500 VA.

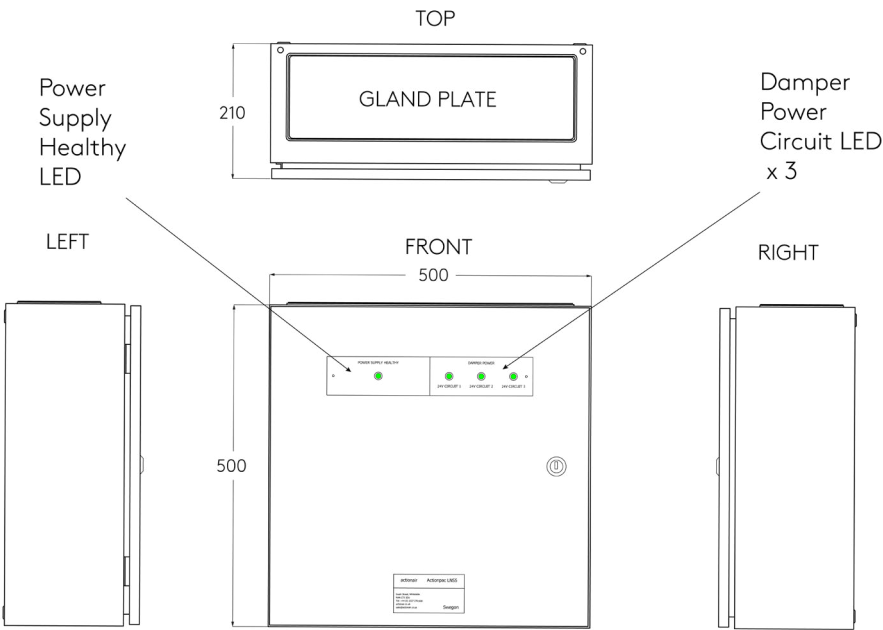


Figure 3. PSP-3 top, front, left, and right views, and LEDs

Disclaimers

- The information herein is subject to change without notice. Actionair by Swegon do not assume any liability arising out of the use of this product.
- Purchase of goods and services is subject to Swegon Ltd Terms and Conditions.

Warnings

- This product forms part of a life-safety system. Failure to correctly store, handle, install, and maintain the product will directly put at risk the lives of the occupants and the fabric of the building.
- The responsible body shall be made aware that, if the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.
- Unauthorised modifications to the panel are not allowed, and will render the warranty void.

Safety Notes

- Only allow trained and qualified personnel to install, replace, or service this equipment.
- Adhere to the relevant local safety standards.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Documentation feedback

Please send any comments on this document to:

documents@swegon.com

We appreciate your comments.

Obtaining Documentation

For the most recent version of this document, go to

[Swegon Documents](#)

or scan the QR code:



Actionair by Swegon - trusted partners for fire safety

Swegon Ltd,
Joseph Wilson Industrial Estate,
South Street, Whitstable,
CT5 3DU, Kent, UK

Tel: +44 (0) 1227276100
Web: swegon.com/uk/

© Copyright Swegon UK 2026. All Rights Reserved.

actionair
by Swegon