2026-06

ABC-SFK4
KOMFORTSPJÆLD

- Bladtæthed: Klasse 4
- Husets tæthed: D (ATC 2)
- Trykklasse B
- Robust udførelse
- Beskyttet forbindelsesled

ANVENDELSE
ABC-SFK4 er beregnet til regulering og aflukningi luftbehandlingsaggregater.
Til rektangulære kanaler.

UDFØRELSE
Nylonlejer og EPDM-tætninger. Leveres til tilslutningsguide, men kan også udføres med flangekant 40 mm. Forbindelsesleddet er beskyttet for eventuel kanalisolering. Husk ikke at skrue i produktet, men kun i tilslutningsflangerne. ABC-SFK4 kan leveres med fabriksmonterede motorer, alternativt håndbetjening. Fremstilles i stålplade af zinkmagnesium ZM120, korrosivitetsklasse C4 i henhold til SS-EN ISO 12944-2, men fås også i andre materialer:

- Zinkmagnesium ZM120
- Zinkmagnesium ZM310
- Aluzink
- Rustfrit stål
- Syrefast rustfrit stål

TÆTHEDSKLASSE I HENHOLD TIL EN 1751:2024
Bladtæthed: Klasse 4
Husets tæthed: D (ATC 2)
Tæthedstests i henhold til EN 1751:2024
i henhold til RISE-rapport 1331242A.

DRIFTSTRYK
Maks. 2500 Pa i differenstryk over lukket spjæld.
Spjældene er fremstillet til trykklasse B.

Driftstemperatur
Maks. 70 ºC.

STØRRELSE
I størrelser i trin på 100 mm op til 1600 x 1600 er standardstørrelser. Se størrelses-/momenttabellen nedenfor. Ved større størrelser kan spjældet opdeles i sektioner.

TILBEHØR
Aktuator
Manuel betjening
Flangekant 40 mm
Isolerede spjældblade

EKSEMPEL BESKRIVELSESTEKST
VVS AMA
QJB.41

Spjæld ABC-SFK4 fra Swegon fabrikat.
Husets tæthed D (ATC 2). Tæthedsklasse 4 over blad.
Udført i zinkmagnesium ZM120. Komplet med fabriksmonteret motor som anbefalet af producenten.
SM 24. Spænding: 24 V Funktion: 2-positions.
Størrelse: 600 x 600.

SM

SFA

SF

EF

GM

Håndbetjening

Aksellængde 77 mm, ø15

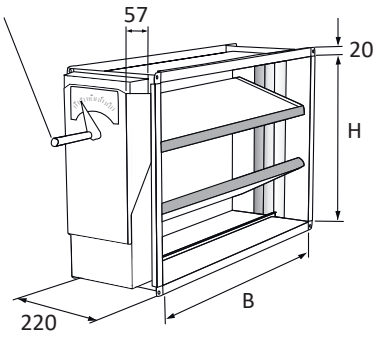

ABC-SFK4 MOTORTABEL

Vægt ca. 41 kg/m² dæmperoverflade.

Bredde / Højde	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
300	N/A	N/A	N/A	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
400	N/A	N/A	N/A	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
500	N/A	N/A	N/A	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
600	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
700	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
800	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
900	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
1000	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
1100	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
1200	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
1300	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA
1400	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	EF, GM
1500	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	EF, GM	EF, GM
1600	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	SM, SF, SFA	EF, GM	EF, GM	EF, GM

DIMENSIONERING

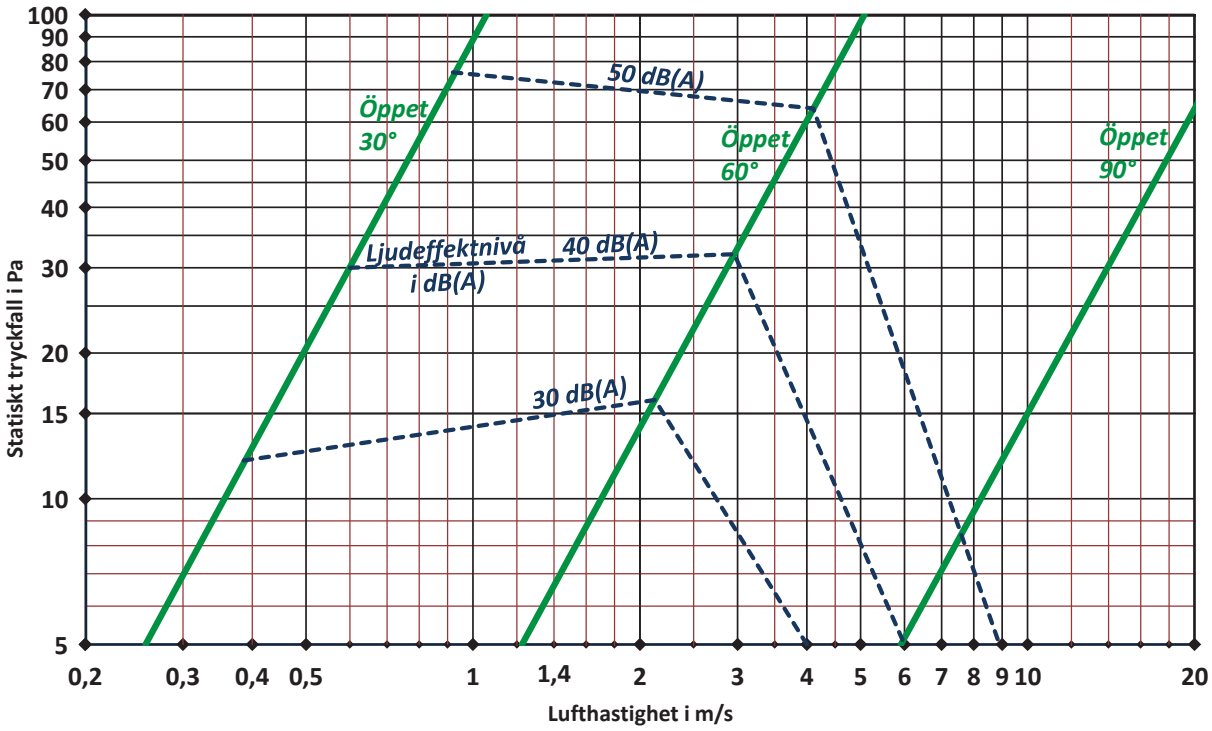

Angivne data er vejledende værdier

Lyd- og trykmålinger udført af RISE